

## DataLogger 8 Series – GEN 2.5 Vehicle Telematics (DL 820/DL 850/DL 860)

Danlaw's DataLogger 8-Series vehicle telematics solution is a one-of-a-kind, hybrid wireless communication device that enables data communication and connectivity via 3G UMTS/HSPA or CDMA 1XRTT, BLE wireless connections. Danlaw's hybrid communication approach provides wireless data transmission by using the driver's smartphone or the DataLogger's dedicated 3G UMTS with 2GSM/GPRS fallback or CDMA wireless data connections.

### Benefits

- Same small size as 7 Series
- 3G UMTS/HSPA for AT&T and T-Mobile
- CDMA 1xRTT for Verizon & Sprint
- Integrated Dual Mode Bluetooth
- Bluetooth Low Energy (BLE) Support
- GPS/GLONASS for position accuracy
- Cost Effective

### Features

- OBD-II data collection
- Industry leading vehicle compatibility
- Self-Installed – plug-n-go via OBD-II port
- Self-Contained – no external antennas
- Ignition ON/OFF detection
- Dual Mode Wireless – GSM and Bluetooth
- Cost effective data transmission
- 3-Axis Accelerometer - 13-bit sampling
- Self-Normalizing Accelerometer
- 56 Channel GPS/GLONASS
- Over-the-air re-flash (FOTA)
- Enhanced Anti-Tampering
- Real-time Event Capture and Transmission
- Certifications – FCC, PTCRB, AT&T, RoHS


### Markets

- Insurance (UBI, PAYD, PHYD)
- Teen Tracking
- Loyalty Programs
- Fleet Tracking
- Mobile Resource Management (MRM)
- Roadside Assistance
- Remote Vehicle Diagnostics
- Government and Military
- Connected Vehicle Research
- Custom Applications



### Hybrid Bluetooth - 3G UMTS/HSPA or CDMA Communication Model

The DataLogger 8-Series device enables direct connectivity between vehicles, Bluetooth enabled phones and cloud-based and backend servers.

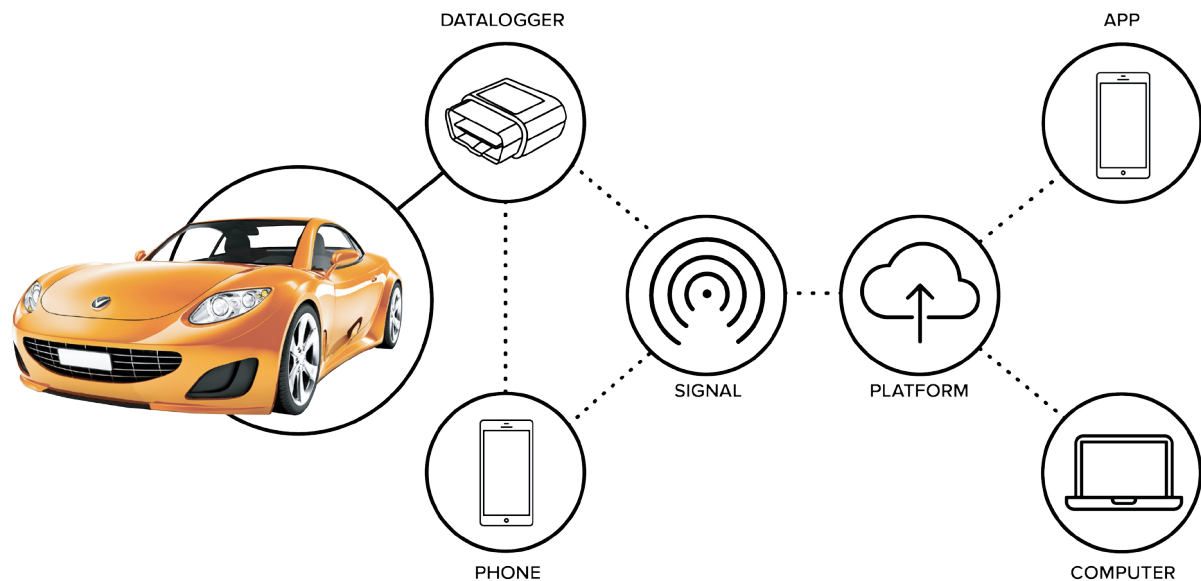

# DataLogger 8 Series – GEN 2.5 (DL 820/DL 850/DL 860)

Physical Characteristics	GEN 2.5 - DL 820/850 (CDMA)	GEN 2.5 - DL 860 (UMTS/HSPA/GSM)
Dimensions	Ultra Compact (L = 43 mm, W = 46 mm, H = 23 mm)	Ultra Compact (L = 43 mm, W = 46 mm, H = 23 mm)
Weight	31.2 g (1.1 oz)	32.1 g (1.13 oz)
Environment	IP64	IP64
Temperature Range	-40°C to +85°C (operating), -40°C to +85°C (storage)	-40°C to +85°C (operating), -40°C to +85°C (storage)
Humidity	0% to 95% (non-condensing) (SAE J1455)	0% to 95% (non-condensing) (SAE J1455)
Shock, Vibration, and Heat	SAE J1455, SAE J1211	SAE J1455, SAE J1211

## Certifications

Carrier Certifications	FCC, PTCRB, DL850 Verizon, DL820 Sprint	FCC, PTCRB, and AT&T Certified
Environmental Certifications	RoHS Compliant	RoHS Compliant

## Electrical Characteristics

Supply Voltage	12V (min. 9V to max. 24V)	12V (min. 9V to max. 18V)
Current Consumption	<4 mA Average (during Sleep mode) <100 mA @ 12VDC (Data Upload)	<4 mA Average (during Sleep mode) <100 mA @ 12VDC (Data Upload)
Voltage Protection	Over and Reverse Voltage, Load Dump (J1113/11), Short Circuit, Transients (ISO 167502), ESD (J1113/13)	Over and Reverse Voltage, Load Dump (J1113/11), Short Circuit, Transients (ISO 167502), ESD (J1113/13)
Current Protection	Internal protection (2 amps)	Internal protection (2 amps)

## Vehicle Communication

Protocol Support	GMLAN, FNOS, ISO 15765, ISO-9141-2, J1850 PMW, J1850 VPW, KWP-2000, ISO-14230-4	GMLAN, FNOS, ISO 15765, ISO-9141-2, J1850 PMW, J1850 VPW, KWP-2000, ISO-14230-4
Protocol Detection	Automatic vehicle protocol recognition	Automatic vehicle protocol recognition
Ignition ON Detect	Automatic wake-up from sleep mode	Automatic wake-up from sleep mode
Ignition OFF Detect	Automatic sleep mode on IGN OFF (saves power)	Automatic sleep mode on IGN OFF (saves power)

## Wireless

	CDMA2000 1xRTT	3G - UMTS/HSPA/GSM/GPRS
Cellular	Dual-band CDMA2000 1xRTT 800 MHz/1900 MHz	UMTS/HSPA/GSM/GPRS 800/850/1800/1900 MHz
Wireless Carrier Support	Verizon (DL850), Sprint (DL820) and Aeris (DL850)	AT&T, T-Mobile, Rogers Wireless, Vodafone, etc.
Output Power	Class 0 (24 dBm) @ 800 MHz Class 1 (24 dBm) @ 1900 MHz	Class 3 (24 dBm) for WDCMA/HSDPA/HSUPA Class 4 (33 dBm) @ 850 MHz for GSM/GPRS Class 1 (30 dBm) @ 1900 MHz for DCS/PCS
Module RF Sensitivity	108 dBm typical @ 800 MHz 108 dBm typical @ 1900 MHz	108 dBm typical @ 850 MHz 108 dBm typical @ 1900 MHz
COMM	TCP/IP, UDP, FTP, HTTP	TCP/IP, UDP, FTP, HTTP
SMS	Point-to-Point MO and MT SMS cell broadcast	Point-to-Point MO and MT SMS cell broadcast
Jamming Detection		GSM Jamming Detection
Bluetooth	Bluetooth 4.0, BLE, Dual-Mode support, multi-phone, Secure Simple Pairing, Serial Port Profile	Bluetooth 4.0, BLE, Dual-Mode support, multi-phone, Secure Simple Pairing (SSP), Serial Port Profile (SPP)
Antenna	Internal built-in Bluetooth and CDMA Cellular	Internal built-in Bluetooth and HSPA Cellular
FOTA	Firmware-Over-The-Air update for configuration and device firmware and complete device	Firmware-Over-The-Air update for configuration and device firmware

## GPS

Receiver	56-channel GPS receiver, GLONASS Tracking: -162 dBm	56-channel GPS receiver, GLONASS Tracking: -162 dBm
Antenna	Internal built-in	Internal built-in
Cold Start	<29 seconds TTFF Sensitivity -148 dBm	<29 seconds TTFF Sensitivity -148 dBm
Hot Start	<1 second Sensitivity -148 dBm	<1 second Sensitivity -148 dBm
Data Acquisition Rate	Typical 1 Hz	Typical 1 Hz
Accuracy	Position 2.5 m CEP	Position 2.5 m CEP
A GPS	AssistNow™ Autonomous (no data usage cost)	AssistNow™ Autonomous (no data usage cost)
Anti-jamming	Integrated GPS anti-jamming	Integrated GPS anti-jamming

## Accelerometer

3-Axis	X, Y, Z output	X, Y, Z output
Output Resolution	+/- 2, 4, 8, 16 g (13 bit sampling max.)	+/- 2,4,8,16 g (13 bit sampling Max)
Auto-Normalization	Self-Calibrating, Auto-Normalization of the data to the vehicle's direction of motion	Self-Calibrating, Auto-Normalization of the data to the vehicle's direction of motion

## Misc.

Installation	Self-Installed (10 sec or less)	Self-Installed (10 sec or less)
Data Collection Interval	Configurable (1 Hz max.)	Configurable (1 Hz Max)

# DataLogger 8 Series – GEN 2.5 (DL 820/DL 850/DL 860)

## Product Comparison

	GEN 2 - DL 7-series DL 750	GEN 2.5 - DL 8-series DL 820/DL 850	GEN 2.5 - DL 8-series DL 860
<b>Feature</b>			
OBD-II Communication	●	●	●
3-Axis Accelerometer	●	●	●
Device Size	L=43mm, W=46mm, H=23mm	L=43mm, W=46mm, H=23mm	L=43mm, W=46mm, H=23mm
<b>Wireless Communication</b>			
	2G GSM/GPRS	CDMA2000 1xRTT	3G UMTS/HSPA -2G
3G UMTS/HSPA			●
2G GSM/GPRS	●		●
2G CDMA 1xRTT		●	
Built-in/Self-Contained Antenna IP64	Quad-Band Proprietary	Dual-Band Proprietary	Quad-Band Proprietary
<b>Wireless Carrier Support (US and Canada)</b>			
AT&T	●		●
Verizon		● (DL 850)	
Sprint		● (DL 820)	
T-Mobile	●		●
Rogers	●		●
Aeris		●	
Telus			●
<b>Bluetooth</b>			
	BT 2.1 + EDR	BT 4.0 + BLE (Dual Mode)	BT 4.0 + BLE (Dual Mode)
Bluetooth Low Energy (BLE)		●	●
Apple iOS		●	●
Android iOS	●	●	●
<b>GPS</b>			
GPS - Hardware	Ublox - NEO 6M	Ublox - MAX 7Q	Ublox - MAX 7Q
GPS Antenna	Proprietary Antenna tuned for NEO	Proprietary Antenna tuned for MAX	Proprietary Antenna tuned for MAX
Ring Detect Hardware Support		●	●
Cell Locate		●	●
<b>SIM</b>			
Physical SIM Card	●		●
Solderable Chip SIM			●

## Contact Us

**Danlaw, Inc.**  
 41131 Vincent Court  
 Novi, Michigan 48375 USA  
 Tel: 1 (248) 476-5571  
 Fax: 1 (248) 471-4485  
[sales@danlawinc.com](mailto:sales@danlawinc.com)

This document is provided for information purposes only and the contents hereof are subject to change without notice.

Danlaw reserves all rights to this document and the information contained herein. No warranty or guarantee of any kind, either express or implied, is made in relation to the accuracy, reliability fitness for a particular purpose or content of this document.

## Product Code Feature Comparison

	DL 820 DL 850-12A	DL 820 DL 850-32A	DL 860-12A	DL 860-32A
<b>Feature</b>				
OBD-II Communication	●	●	●	●
3-Axis Accelerometer	●	●	●	●
UTMS/HSPA/GSM/GPRS			●	●
CDMA	●	●		
GPS-Position Data	●		●	